# Interface Leads

Made in Denmark by
Kram Telecom A/S

# Interface Leads

## Instruction for

**Line-In cable 68610 for Audi -2001**

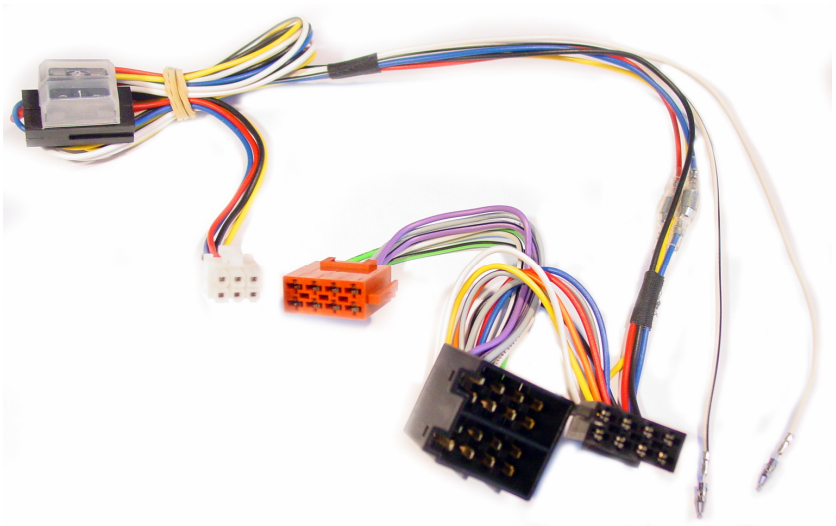

Made in Denmark by
Kram Telecom A/S

# Interface Leads

## Product description
### Line-In cable 68610 for Audi -2001

**Interface Leads** are used for car stereos with a Line-In function or VDA preparation. It enables the use of the car speakers when answering/making calls from your cell phone. Thereby using the radios build-in mute function.

Speaker-function: This is achieved by connecting the carkit directly to the cars Line-In input/VDA connector. By using the radios built-in relays the telephone conversation is send through the car speakers while the radio is muted. This way you will achieve a perfect hands free sound without interference from the car radio.

For a complete cable-set two item no. is required. The first is a car-specific Interface Lead. The second is a carkit-specific Interface adaptor cable .

Power supply of the carkit: All Interface Leads are delivered with a power connector for the carkit. That way you avoid cutting the cars wiring loom.

Please check the radio instruction manual for special issues regarding the connection and set-up of the radio when connecting a carkit.

**See our complete Interface program on**
**www.kram.dk**

Interface Leads

## Installation description
### Line-In cable 68610 for Audi -2001

**1st.** Remove the radio and disconnect the 10 pin ISO connector and the two 8 pins ISO connectors from rear of the radio.

**2nd.** Insert the Line-In cable between the radio and the ISO connectors.

**3rd.** After installation please adjust the telephones volume level to it´s middle position and adjust volume level as described in the radios instruction manual.

When the Interface Lead is installed correctly it will redirect your call through the car front speaker. and allow the telephone volume to be adjusted using the radios volume control.

Remember to use a carkit Interface adaptor to connect the carkit to the VDA cable.

**Note:** Please check the configuration of the Ignition plus and the constant plus as they in some models can be switched. If the ignition and the constant plus is switched it can be corrected by using the two bullit connectors.